




Operating Instructions Models 46501 and 465010 Hydrostatic Test Pumps

Specifications

46501	
DIMENSIONS:	28" (70cm) L x 24" (60cm) W x 35" (87.5cm) H
WEIGHT:	136 lbs. 62 kg
PUMP:	Triple Diaphragm: Positive Displacement Ports: 1" inlet ; ¾" NPT outlet Capacity: 10gpm, 38lpm Pressure: 0-500psi Operating Speed: 550rpm Lubrication: Pump 30W Non-detergent Oil Gear 80/90W Gear Oil Shaft Size: 1"
ENGINE:	6.5hp Briggs & Stratton Intek Pro, 4 cycle, gasoline
CONTROL:	0 – 500psi adjustable pressure relief valve
GAUGE:	Glycerin filled, 0 – 600psi, 0-42kg
DISCHARGE HOSE:	¾" x 10' (3m) 1000psi rated
INLET HOSE:	¾" x 10' (3m) with strainer

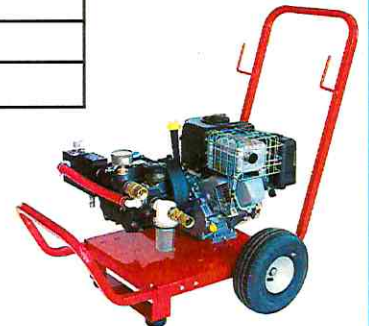

465010	
DIMENSIONS:	28" (70cm) L x 24" (60cm) W x 35" (87.5cm) H
WEIGHT:	136 lbs. packed, 62 kg
PUMP:	Triple Diaphragm: Positive Displacement Ports: 1" inlet ; ¾" NPT outlet Capacity: 10gpm, 38lpm Pressure: 0-500psi Operating Speed: 550rpm Lubrication: Pump 30W Non-detergent Oil Gear 80/90W Gear Oil Shaft Size: 1"
ENGINE:	Honda 5.5hp, 4 cycle, gasoline
CONTROL:	0 – 500psi adjustable pressure relief
GAUGE:	Glycerin filled, 0 – 600psi, 0-42kg
DISCHARGE HOSE:	¾" x 10' (3m) 1000psi rated
INLET HOSE:	¾" x 10' (3m) with strainer